

Company information:


PRIME PORTAL inc.
Company registration no.: 1001120039
Address:
Charmaine Heights 3421
L5A3C2 Mississauga
Ontario Canada

Contact details:

Pavlo
phone number.: 4162944675
e-mail: info@primeportal.ca

Price details WEB/25/0827552
24/05/2025

Door 001	Quantity: 1	System: Aluprof MB-86N, thermal break system	Colour: RAL: 8016 (Mahogany brown) Matt
----------	----------------	--	---

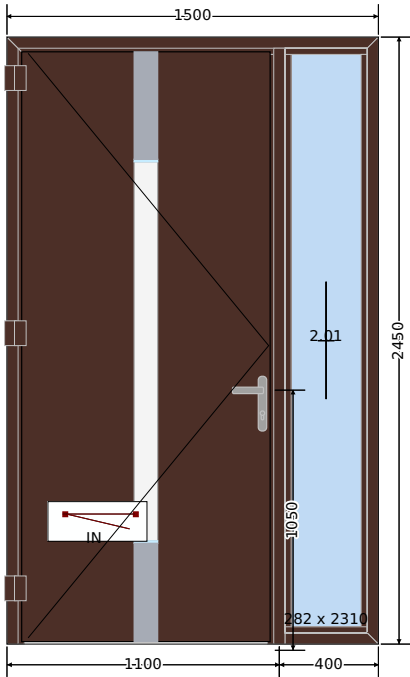

Inside View

Outer frame	K528612, frame 69.5 mm
Wall configuration	Standard
Dimensions	1500 mm (Short for millimetre) x 2450 mm (Short for millimetre)
DRAINAGE	Drainage standard (visible, at front)
anchor assembly	without anchor assembly
Door sill	Falling threshold
Transom	K528652, Transom 94.5 mm, fix and doors
Glazing required	4th/16Ar/4/16Ar/4th [Ug=0.6]
Glazing bead	Standard Glazing bead
Sash 1	K528763, Sash Despiro opening inwards, overlay on both sides
Glazing bead	Standard Glazing bead
Central frame gasket	Yes
Panel	Despiro Panel
MODEL (DESIGN)	DP11
GLAZING	according to the catalogue
Kolor nakładki	Inox
Fitting	Turn - door hardware DESPIRO
Door bolt	KFV 5-point AS2600
- Hitch lath	Yes
Lock cylinder	Double-sided
Cylinder D-class SKG - EMERGENCY	Yes
lock insert	Silver
Standard number of keys:	5 keys
internal side	Klamka Sobinco Touch / Edge
Outside	Klamka Sobinco Touch / Edge
Hinges	Siegenia hidden
Hinge color	INOX
Sash 2	Fix in frame

Glazing bead	Standard Glazing bead
<i>Glazing from the outside</i>	No
Messages	
Glass partially sanblasted.	
EkoOkna panel	
Panel in dark colours should not be installed in places exposed to sunrays.	
The drawings of the panels are demonstrative. Patterns should be verified with the catalog.	
Insert dimension outside/inside 6535	
Insert dimension is given for signs or thicknesses of +/- 10mm.	
The door has 3 hinges.	
We recommend the selection of skirting sash opening limiter.	
Inward opening	
Maximum opening angle when applying hidden hinges is 100°	
Door opening only through the use of key.	
Dimension of light quarter - sash active opening 95° W x H : 966.4 x 2380.1	
Filling dimension No. [2]: 12.62x92.45	
Special offer: no extra charge for the warm spacer for glazing.	
Black drainage covers	
USA: The customer should specify the requirements for parameters and certificates that a given structure should have	
USA: The descriptor is obliged to check that the structure meets the parameters specified by the customer	
USA: The availability of the required certificates for the selected structure can be checked at the Eko Okna Process Manager	
USA: The MB86N system doesn't currently have certificates and analysis for the US market.	
When such height of an element, it is transported on its side	
Rw (C;Ctr) = No performance Determined	
Thermal coefficient	Uw (Short for U window - European thermal norm) = 1,2 W/m²·K (Short for surface thermal transmittance unit: Watt/square metre * Kelvin)
Unit weight	131,7 Kg (Short for Kilogram)
Perimetre	7.9 m
Accessories	Amount
Panel obustronnie nakładkowy 77mm	1
Doubel-sided Despiro Panel RAL 8016, Model DP11, outside dimensions: 972 x 2366, inside dimensions: 1022.45 x 2391	1
Passage (active sash opening 95° width: 966 x 2380)	1
Window volume 0.31 m³	78.09375

Fillings		Dimensions
2.01	4th/16Ar/4/16Ar/4th [Ug=0.6] Solar gain = 54 % Light transmission = 74 %	320 x 2348
Price		
Door		CA\$9,881.90

TOTAL				
	Net price	Inc. tax rate	Gross price	
Products	CA\$9,881.90	0%	CA\$0.00	CA\$9,881.90
Articles	CA\$0.00	0%	CA\$0.00	CA\$0.00
Profiles	CA\$0.00	0%	CA\$0.00	CA\$0.00
Services	CA\$0.00	0%	CA\$0.00	CA\$0.00
Additional charges	CA\$0.00	0%	CA\$0.00	CA\$0.00
TOTAL price	CA\$9,881.90			CA\$9,881.90

Thermal coefficient summary						
Window	Qty	Uw (Short for U	Surface	Total surface	Qty x Uw (Short for U x Surface	Comment
001	1	1,2 W/m²·K	3.675 m² (Short for Sq	3.675 m² (Short for Sq	4.410 W·K (Short for W	
	1			3.675 m² (Short for Sq	4.41 W·K (Short for W	
Average thermal coefficient: 1,2 W/m²·K (Short for surface thermal transmittance unit: Watt/square metre * Kelvin)						
Total weight: 131.7 kg						
Total perimetre: 7.9 m						