

Company information:

PRIME PORTAL inc.

Company registration no.: 1001120039

Address:

Charmaine Heights 3421

L5A3C2 Mississauga

Ontario Canada

Contact details:


Pavlo

phone number.: 4162944675

e-mail: info@primeportal.ca

Price details WEB/25/0827563
24/05/2025

Door 001	Quantity: 1	System: Aluprof MB-86N, thermal break system	Colour: RAL: 7012 (Basalt grey) Matt
----------	----------------	--	--------------------------------------

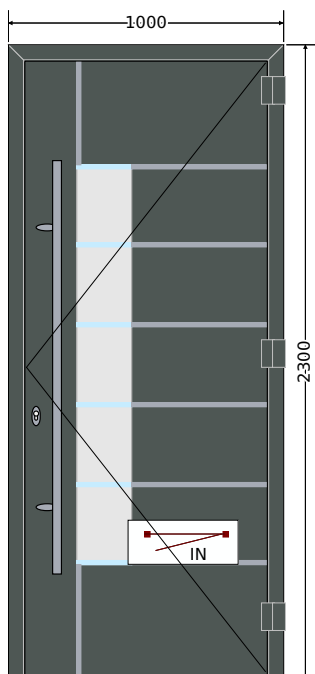

Inside View

Outer frame	K528730, door frame, 69.5 mm, opening inside
Wall configuration	Standard
Dimensions	1000 mm x 2300 mm
DRAINAGE	Drainage on the bottom frame
anchor assembly	without anchor assembly
Door sill	Door threshold 3 mm + brush
Glazing bead	Standard Glazing bead
Sash	K528763, Sash Despiro opening inwards, overlay on both sides
Glazing bead	Standard Glazing bead
Central frame gasket	Yes
Panel	Despiro Panel
MODEL (DESIGN)	DP2
GLAZING	according to the catalogue
Fitting	Turn - door hardware DESPIRO
Door bolt	KFV 5-point AS2600
- Hitch latch	Yes
Lock cylinder	Double-sided
Cylinder D-class SKG - EMERGENCY	Yes
lock insert	Silver
Standard number of keys:	5 keys
internal side	Pull handle DP
Lock cylinder rosette inside	Yes
- DP pull handle type inside	FI32 45° (Tube pull handle 32mm 45° L=500-2000mm)
Handle/pull handle/rosette color inside	INOX
Outside	Handle on a short lock plate DG59

Handle/pull handle color outside	INOX
Lock cylinder rosette outside	Yes
- Ring lock rosette	Yes
- DP pull handle length	1500
Hinges	Siegenia hidden
Hinge color	INOX
Messages	
Glass partially sanblasted.	
Supplier of Dindecor Panel.	
Panel in dark colours should not be installed in places exposed to sunrays.	
The drawings of the panels are demonstrative. Patterns should be verified with the catalog.	
Insert dimension outside/inside 5035	
The door has 3 hinges.	
The handrail is running loose, assembly holes are made in production.	
We recommend the selection of skirting sash opening limiter.	
Inward opening	
Maximum opening angle when applying hidden hinges is 100°	
Dimension of light quarter - sash active opening 95° W x H : 844.2 x 2227.1	
DOORS with BRUSH, NO TIGHTNESS GUARANTEE	
USA: The customer should specify the requirements for parameters and certificates that a given structure should have	
USA: The descriptor is obliged to check that the structure meets the parameters specified by the customer	
USA: The availability of the required certificates for the selected structure can be checked at the Eko Okna Process Manager	
USA: The MB86N system doesn't currently have certificates and analysis for the US market.	
Rw (C;Ctr) = No performance Determined	
Thermal coefficient	Uw = 1,3 W/m²·K
Unit weight	82,8 Kg
Perimeter	6.6 m
Accessories	Amount
K412677, Próóg ,Kolor: Anoda C0	1
Gr D - Panel obustronnie nakładkowy 77mm	1
Panel Despiro Dwustronny RAL_7012, Model DPA2, wymiar zewnętrzny: 850 x 2216, wymiar wewnętrzny: 900.2 x 2241	1
Passage (active sash opening 95° width: 844 x 2227)	1
Window volume 0.2 m³	48.875
Price	
Door	CA\$9,328.72

TOTAL				
	Net price	Inc. tax rate	Gross price	
Products	CA\$9,328.72	0%	CA\$0.00	CA\$9,328.72
Articles	CA\$0.00	0%	CA\$0.00	CA\$0.00
Profiles	CA\$0.00	0%	CA\$0.00	CA\$0.00
Services	CA\$0.00	0%	CA\$0.00	CA\$0.00
Additional charges	CA\$0.00	0%	CA\$0.00	CA\$0.00
TOTAL price	CA\$9,328.72			CA\$9,328.72

Thermal coefficient summary					
Window	Qty	Uw	Surface	Total surface	Qty x Uw x Surface
001	1	1,3 W/m²·K	2.297 m²	2.297 m²	2.986 W·K
	1			2.297 m²	2.986 W·K
Average thermal coefficient: 1,3 W/m²·K					
Total weight: 82.8 kg					
Total perimeter: 6.6 m					