

Company information:


PRIME PORTAL inc.
Company registration no.: 1001120039
Address:
Charmaine Heights 3421
L5A3C2 Mississauga
Ontario Canada

Contact details:

Pavlo
phone number.: 4162944675
e-mail: info@primeportal.ca

Price details WEB/25/0827566
24/05/2025

Door 001	Quantity: 1	System: Reynaers MASTER LINE 8, system with thermal break	Colour: RAL: 7016 (Anthracite grey) Matt
----------	----------------	--	--

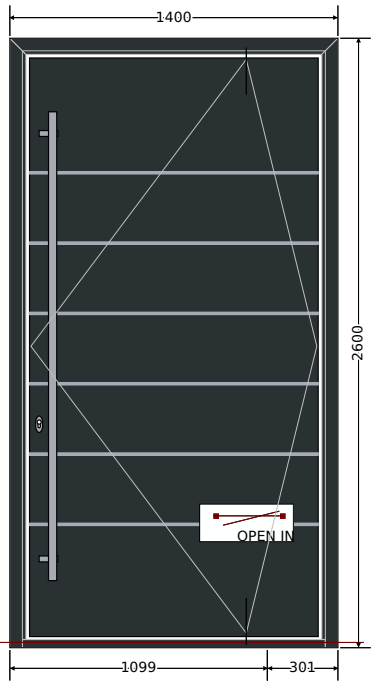

Inside View

Outer frame	408.0898/0498, PIVOT Door Frame, 68.5mm
Wall configuration	Standard
Dimensions	1400 mm x 2600 mm
DRAINAGE	Drainage on the bottom frame
anchor assembly	without anchor assembly
Thermal version	HI
Corner of the locking gasket	No
Door sill	Falling threshold + Threshold profile 408.1860.XX
Glazing bead	Standard Glazing bead
Sash	408.1334, Despiro PIVOT Door leaf INWARD, 104.5 mm
Glazing bead	Standard Glazing bead
Door leaf rotation axis - in mm	301
Panel	Despiro Panel
MODEL (DESIGN)	DP4
Fitting	Tilt - door hardware PIVOT
Bolting option	Handle side only
Door bolt	FUHR 835 automat
Lock cylinder	Double-sided
Cylinder D-class SKG - EMERGENCY	Yes
lock insert	Silver
Standard number of keys	5 keys
internal side	Pull handle DP
Lock cylinder rosette inside	Yes
- Pull handle type DP inside	KW45° 35 x 35 (Square pull handle 45° L=500-2500mm)
Handle/pull handle/rosette color inside	INOX

<i>Outside</i>	<i>Pull handle DP</i>
<i>- DP pull handle type outside</i>	<i>KW45° 35 x 35 (Square pull handle 45° L=500-2500mm)</i>
<i>Handle/pull handle color outside</i>	<i>INOX</i>
<i>Lock cylinder rosette outside</i>	<i>Yes</i>
<i>- Oval rosette</i>	<i>Yes</i>
<i>- DP pull handle length</i>	<i>2000</i>
<i>Hinges</i>	<i>FJ PIVOT</i>
<i>LIMITER</i>	<i>Yes</i>
Messages	
Supplier of Dindecor Panel.	
Panel in dark colours should not be installed in places exposed to sunrays.	
The drawings of the panels are demonstrative. Patterns should be verified with the catalog.	
Insert dimension outside/inside 6535	
The maximum door opening angle is 90 °.	
The handrail is running loose, assembly holes are made in production.	
Inward opening	
We kindly remind you that the handles from chosen series are too close to lock insert.	
Automatic espagnolette is not suitable for a HANDLE / HANDLE combination	
Dimension of light quarter - sash active opening 95° W x H : 0	
When there are use cases in the messages that may accidentally occur in the case of bimetal	
Dark colour of profiles, installation from the PD or PD-WEST side,	
Exposure to direct sunlight (no roof, sheltering buildings or trees).	
You can sunk subthreshold profile 33 mm inwards and 23 mm outwards in the floor.	
For information about the construction's resistance declarations, please contact the certification department.	
USA: The customer should specify the requirements for parameters and certificates that a given structure should have	
USA: The descriptor is obliged to check that the structure meets the parameters specified by the customer	
USA: The availability of the required certificates for the selected structure can be checked at the Eko Okna Process Manager	
When such height of an element, it is transported on its side	
Rw (C;Ctr) = No performance Determined	
Thermal coefficient	Uw = 1,2 W/m²·K
Unit weight	139,3 Kg
Perimeter	8 m
Accessories	Amount
PROFIL PROGOWY ,Kolor: Anoda C0	1
Gr D - Panel obustronnie nakładkowy 77mm	1
Panel Despiro Dwustronny RAL 7016, Model DPV4, wymiar zewnętrzny: 1251 x 2485, wymiar wewnętrzny: 1199 x 2427	1
Passage (active sash opening 90° width: 890)	1
Window volume 0.52 m^3	129.22
Price	
Door	CA\$15,093.96

TOTAL				
	Net price	Inc. tax rate	Gross price	
Products	CA\$15,093.96	0%	CA\$0.00	CA\$15,093.96
Articles	CA\$0.00	0%	CA\$0.00	CA\$0.00
Profiles	CA\$0.00	0%	CA\$0.00	CA\$0.00
Services	CA\$0.00	0%	CA\$0.00	CA\$0.00
Additional charges	CA\$0.00	0%	CA\$0.00	CA\$0.00
TOTAL price	CA\$15,093.96			CA\$15,093.96

Thermal coefficient summary						
Window	Qty	Uw	Surface	Total surface	Qty x Uw x Surface	Comment
001	1	1,2 W/m²·K	3.591 m²	3.591 m²	4.309 W·K	
	1			3.591 m²	4.309 W·K	
Average thermal coefficient: 1,2 W/m²·K						
Total weight: 139.3 kg						
Total perimeter: 8 m						