

Company information:

PRIME PORTAL inc.

Company registration no.: 1001120039

Address:

Charmaine Heights 3421

L5A3C2 Mississauga

Ontario Canada

Contact details:


Pavlo

phone number.: 4162944675

e-mail: info@primeportal.ca

Price details WEB/25/0827564
24/05/2025

Door 001	Quantity: 1	System: Reynaers MASTER LINE 8, system with thermal break	Colour: Powder Code 1
----------	----------------	--	-----------------------

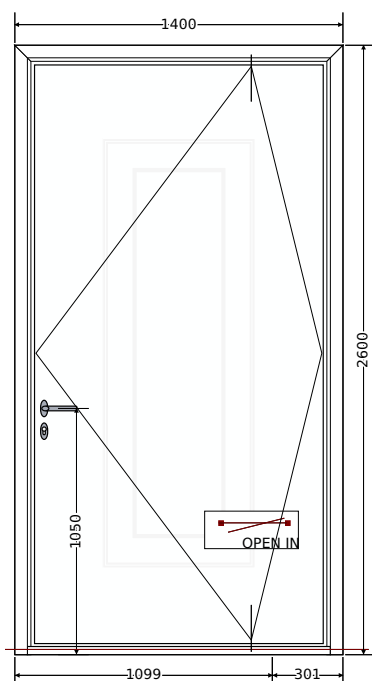

Inside View

Outer frame	408.0898/0498, PIVOT Door Frame, 68.5mm
Wall configuration	Standard
Dimensions	1400 mm x 2600 mm
DRAINAGE	Drainage on the bottom frame
anchor assembly	without anchor assembly
Thermal version	HI
Corner of the locking gasket	No
Door sill	Falling threshold + Threshold profile 408.1860.XX
Glazing bead	Standard Glazing bead
Sash	408.1334, Despiro PIVOT Door leaf INWARD, 104.5 mm
Glazing bead	Standard Glazing bead
Door leaf rotation axis - in mm	301
Panel	Despiro Panel
MODEL (DESIGN)	RL09
Fitting	Tilt - door hardware PIVOT
Bolting option	Handle side only
Door bolt	FUHR 835 automat
Lock cylinder	Double-sided
Cylinder D-class SKG - EMERGENCY	Yes
lock insert	Silver
Standard number of keys	5 keys
internal side	Handle on a short lock plate DG59
Lock cylinder rosette inside	Yes
Handle/pull handle/rosette color inside	INOX
Outside	none

Handle/pull handle color outside	INOX
Lock cylinder rosette outside	Yes
- Oval rosette	Yes
Hinges	FJ PIVOT
LIMITER	Yes
Messages	
Supplier of Dindecor Panel.	
The drawings of the panels are demonstrative. Patterns should be verified with the catalog.	
Insert dimension outside/inside 6535	
The maximum door opening angle is 90 °.	
Inward opening	
Dimension of light quarter - sash active opening 95° W x H : 0	
You can sunk subthreshold profile 33 mm inwards and 23 mm outwards in the floor.	
For information about the construction's resistance declarations, please contact the certification department.	
Only one paint code can be assigned per order.	
USA: The customer should specify the requirements for parameters and certificates that a given structure should have	
USA: The descriptor is obliged to check that the structure meets the parameters specified by the customer	
USA: The availability of the required certificates for the selected structure can be checked at the Eko Okna Process Manager	
When such height of an element, it is transported on its side	
Rw (C;Ctr) = No performance Determined	
Thermal coefficient	Uw = 1,3 W/m²·K
Unit weight	137,6 Kg
Perimeter	8 m
Accessories	Amount
PROFIL PROGOWY ,Kolor: Anoda C0	1
Gr D - Panel obustronnie nakładkowy 77mm	1
Panel Despiro Dwustronny KOD PROSZKU_1, Model DPVRL9, wymiar zewnętrzny: 1251 x 2485, wymiar wewnętrzny: 1199 x 2427	1
Passage (active sash opening 90° width: 890)	1
Window volume 0.52 m³	129.22
Price	
Door	CA\$17,767.29

TOTAL				
	Net price	Inc. tax rate	Gross price	
Products	CA\$17,767.29	0%	CA\$0.00	CA\$17,767.29
Articles	CA\$0.00	0%	CA\$0.00	CA\$0.00
Profiles	CA\$0.00	0%	CA\$0.00	CA\$0.00
Services	CA\$0.00	0%	CA\$0.00	CA\$0.00
Additional charges	CA\$0.00	0%	CA\$0.00	CA\$0.00
TOTAL price	CA\$17,767.29			CA\$17,767.29

Thermal coefficient summary						
Window	Qty	Uw	Surface	Total surface	Qty x Uw x Surface	Comment
001	1	1,3 W/m²·K	3.591 m²	3.591 m²	4.668 W·K	
	1			3.591 m²	4.668 W·K	
Average thermal coefficient: 1,3 W/m²·K						
Total weight: 137.6 kg						
Total perimeter: 8 m						