

Company information:


**PRIME PORTAL inc.**  
**Company registration no.:** 1001120039  
**Address:**  
Charmaine Heights 3421  
L5A3C2 Mississauga  
Ontario Canada

Contact details:

**Pavlo**  
**phone number.:** 4162944675  
**e-mail:** info@primeportal.ca

Price details WEB/25/0827554  
24/05/2025

Door 001	Quantity: 1	System: Aluprof MB-86N, thermal break system	Colour: RAL: 7012 (Basalt grey) Matt
----------	----------------	--	--------------------------------------

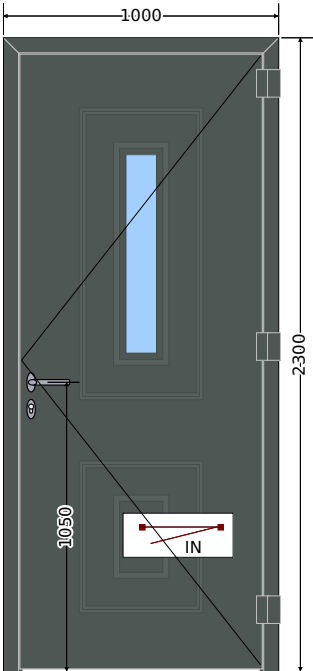

Inside View

Outer frame	K528730, door frame, 69.5 mm, opening inside
Wall configuration	Standard
Dimensions	1000 mm (Short for millimetre) x 2300 mm (Short for millimetre)
DRAINAGE	Drainage on the bottom frame
anchor assembly	without anchor assembly
Door sill	Falling threshold
Glazing bead	Standard Glazing bead
Sash	K528763, Sash Despiro opening inwards, overlay on both sides
Glazing bead	Standard Glazing bead
Central frame gasket	Yes
Panel	Despiro Panel
MODEL (DESIGN)	RL06
GLAZING	according to the catalogue
Fitting	Turn - door hardware DESPIRO
Door bolt	KFV 5-point AS2600
- Hitch lath	Yes
Lock cylinder	Double-sided
Cylinder D-class SKG - EMERGENCY	Yes
lock insert	Silver
Standard number of keys:	5 keys
internal side	Handle on a short lock plate DG59
Lock cylinder rosette inside	Yes
Handle/pull handle/rosette color inside	INOX
Outside	Handle on a short lock plate DG59
Handle/pull handle color outside	INOX

Lock cylinder rosette outside	Yes
- Ring lock rosette	Yes
Hinges	Siegenia hidden
Hinge color	INOX
<b>Messages</b>	
Supplier of Dindecor Panel.	
Panel in dark colours should not be installed in places exposed to sunrays.	
The drawings of the panels are demonstrative. Patterns should be verified with the catalog.	
Insert dimension outside/inside 5035	
The door has 3 hinges.	
We recommend the selection of skirting sash opening limiter.	
Inward opening	
Maximum opening angle when applying hidden hinges is 100°	
Dimension of light quarter - sash active opening 95° W x H : 844.2 x 2230.1	
USA: The customer should specify the requirements for parameters and certificates that a given structure should have	
USA: The descriptor is obliged to check that the structure meets the parameters specified by the customer	
USA: The availability of the required certificates for the selected structure can be checked at the Eko Okna Process Manager	
USA: The MB86N system doesn't currently have certificates and analysis for the US market.	
Rw (C;Ctr) = No performance Determined	
Thermal coefficient	Uw (Short for U window - European thermal norm) = 1,3 W/m²·K (Short for surface thermal transmittance unit: Watt/square metre * Kelvin)
Unit weight	82,3 Kg (Short for Kilogram)
Perimetre	6.6 m
<b>Accessories</b>	
<b>Amount</b>	
Gr D - Panel obustronnie nakładkowy 77mm	1
Panel Despiro Dwustronny RAL 7012, Model DPARL6, wymiar zewnętrzny: 850 x 2216, wymiar wewnętrzny: 900.2 x 2241	1
Passage (active sash opening 95° width: 844 x 2230 )	1
Window volume 0.2 m <sup>3</sup>	48.875
<b>Price</b>	
Door	CA\$12,008.97

TOTAL				
	Net price	Inc. tax rate	Gross price	
Products	CA\$12,008.97	0%	CA\$0.00	CA\$12,008.97
Articles	CA\$0.00	0%	CA\$0.00	CA\$0.00
Profiles	CA\$0.00	0%	CA\$0.00	CA\$0.00
Services	CA\$0.00	0%	CA\$0.00	CA\$0.00
Additional charges	CA\$0.00	0%	CA\$0.00	CA\$0.00
<b>TOTAL price</b>	<b>CA\$12,008.97</b>			<b>CA\$12,008.97</b>

Thermal coefficient summary						
Window	Qty	Uw (Short for U	Surface	Total surface	Qty x Uw (Short for U x Surface	Comment
001	1	1,3 W/m²·K	2.300 m² (Short for Sq	2.300 m² (Short for Sq	2.990 W·K (Short for W	
	1			2.3 m² (Short for Sq	2.99 W·K (Short for W	
Average thermal coefficient: 1,3 W/m²·K (Short for surface thermal transmittance unit: Watt/square metre * Kelvin)						
				Total weight: 82.3 kg		
				Total perimeter: 6.6 m		